


RC SLIMLINE PAN TYPE HUMIDIFIER

ELEVATION

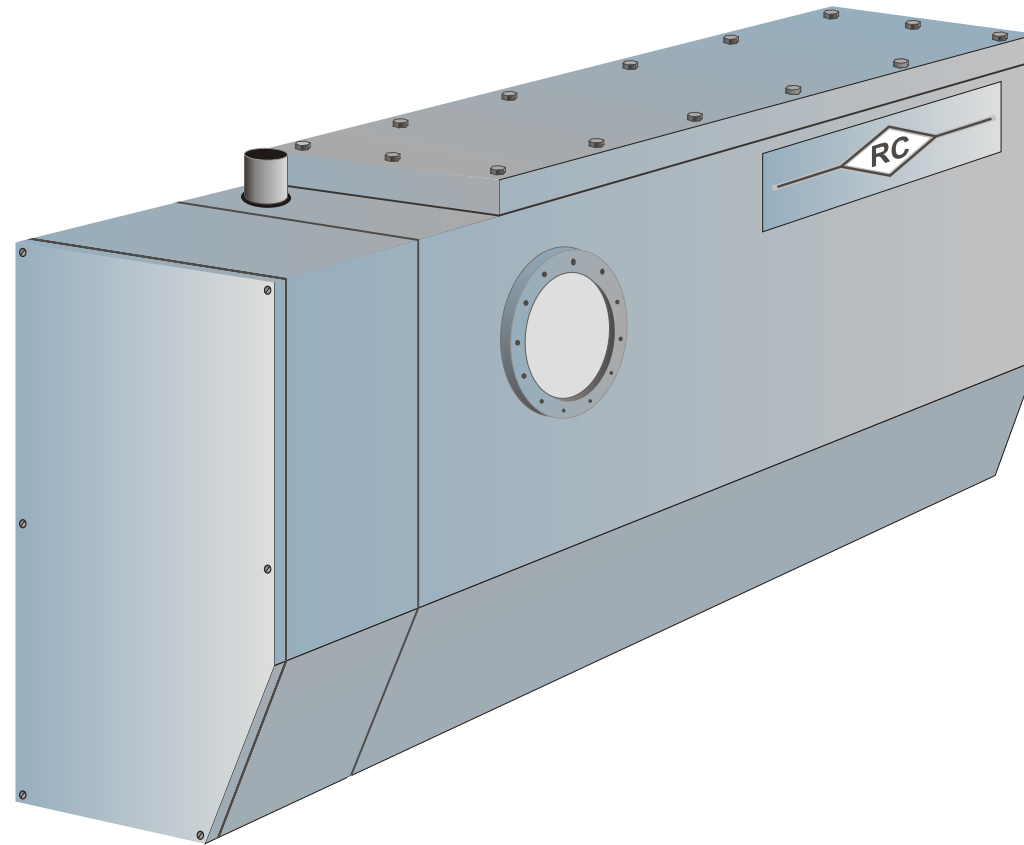

DATA SHEET

TYPE : HORIZONTAL

CONSTRUCTION : MADE FROM M.S/ S.S.SHEET (304) ,WELDED CONSTRUCTION STEAM OUTLET NOZZLE,TOP OPENABLE WITH S.S. BOLTS.

INSULATION : 25 mm THICK FIBER GLASS WOOL (150 CROWN) AND CLADDING WITH 0.5 mm G.I.SHEET.


CONTROLS : LOW WATER LEVEL CUTOUT WITH S.S.BALL , FLOAT VALVE WITH S.S.BALL , SITE GLASS , THERMOSTATS , MAGNESIUM ANODE INSIDE THE TANK WHICH RESISTS THE ILL EFFECTS OF IMPURITIES , THUS INCREASING THE LIFE OF HEATER

WIRING : DULY FACTORY WIRED WITH COPPER BUS BAR CONNECTION.


NOTE : 0.5 K.W. ADDITIONAL HEATER WITH THERMOSTAT TO MAINTAIN TEMPERATURE

CAPACITY	A	B	C
3 KW	11"	9"	22" + 5"
6 KW	11"	9"	22" + 5"
9 KW	13"	10"	26" + 5"
12 KW	14"	11"	28" + 5"
15 KW	18"	11"	29" + 5"
18 KW	18"	11"	29" + 5"

SIDE VIEW

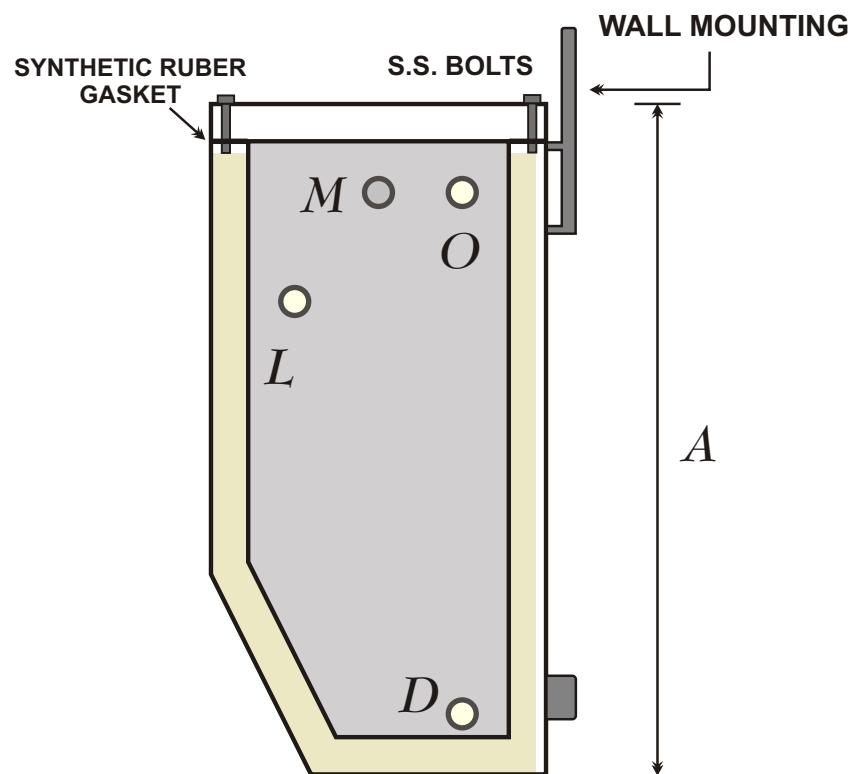

TOP VIEW WITHOUT LID

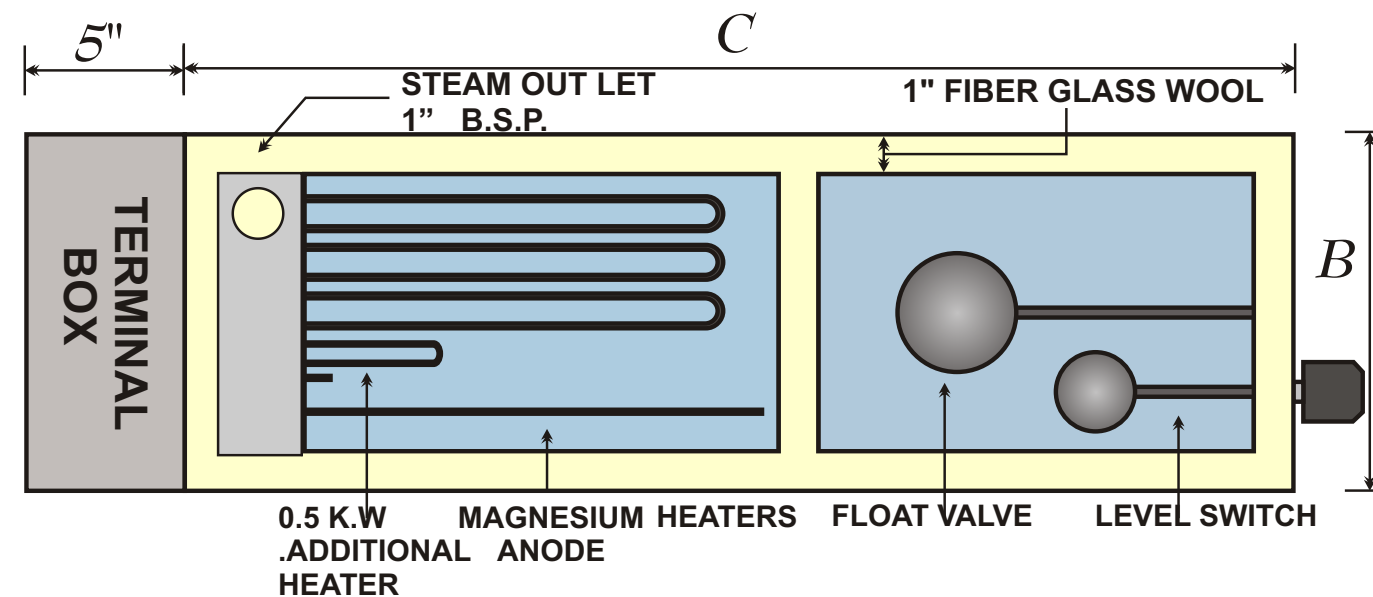

D	DRAIN (1/2")
L	LOW LEVEL SWITCH
M	MAIN INLET (1/2")
O	OVER FLOW (1/2")

RAPID COOL

B - 151 MAYAPURI , PHASE - 1 , NEW DELHI - 64
(INDIA) PHONE - 5131185 , 5143849 , 5143873
5143850 , 5143851 , 5130170 FAX - 5140281.
E - mail - rapid@del3.vsnl.net.in

WIRING DIAGRAM FOR RC PAN TYPE HUMIDIFIER OF (SHEET 2 OF 2)

